

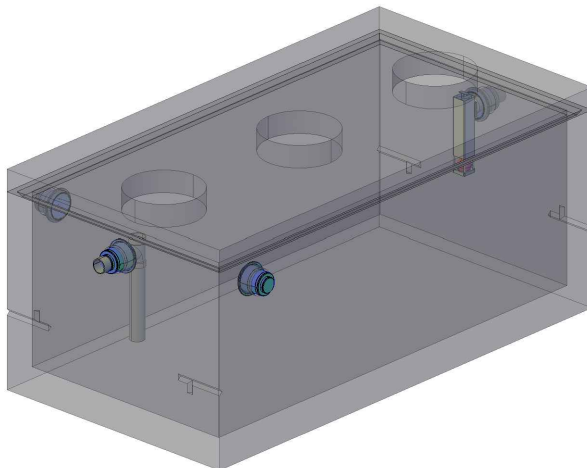


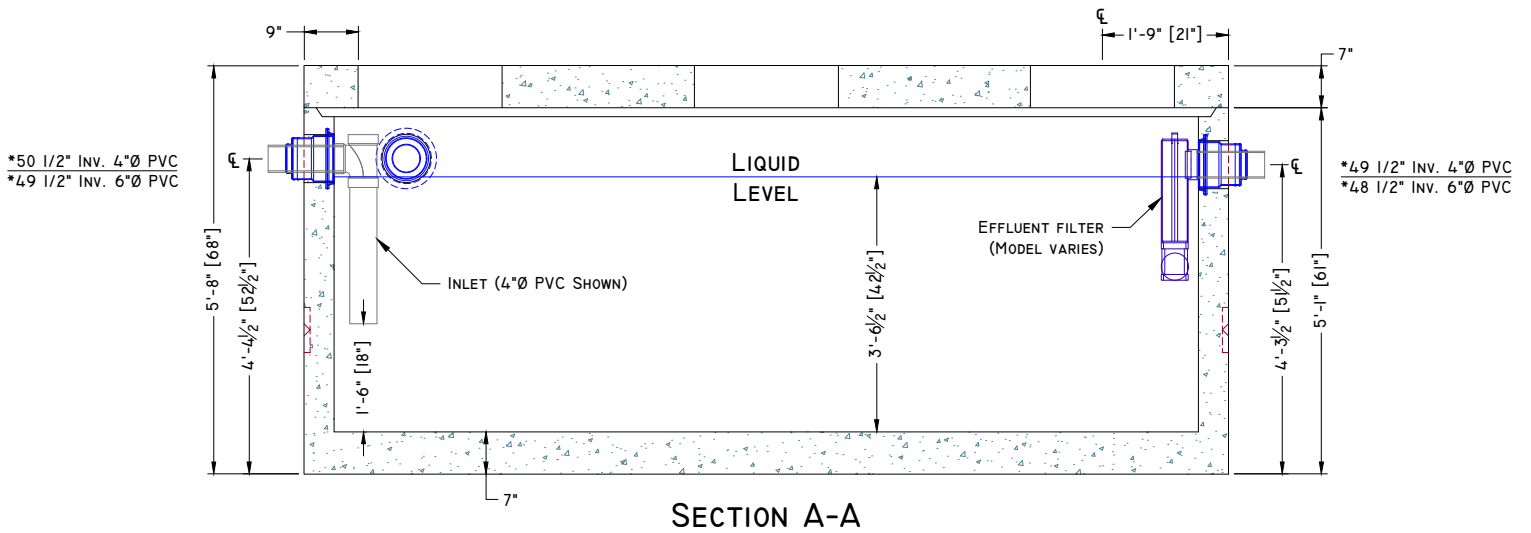

American Concrete Industries

38Y 2000GAL SEPTIC TANK

WWW.AMERICANCONCRETE.COM
 1717 STILLWATER AVE.
 VEAZIE, ME. 04401
 TEL: (207) 947-8334
 FAX: (207) 947-3580

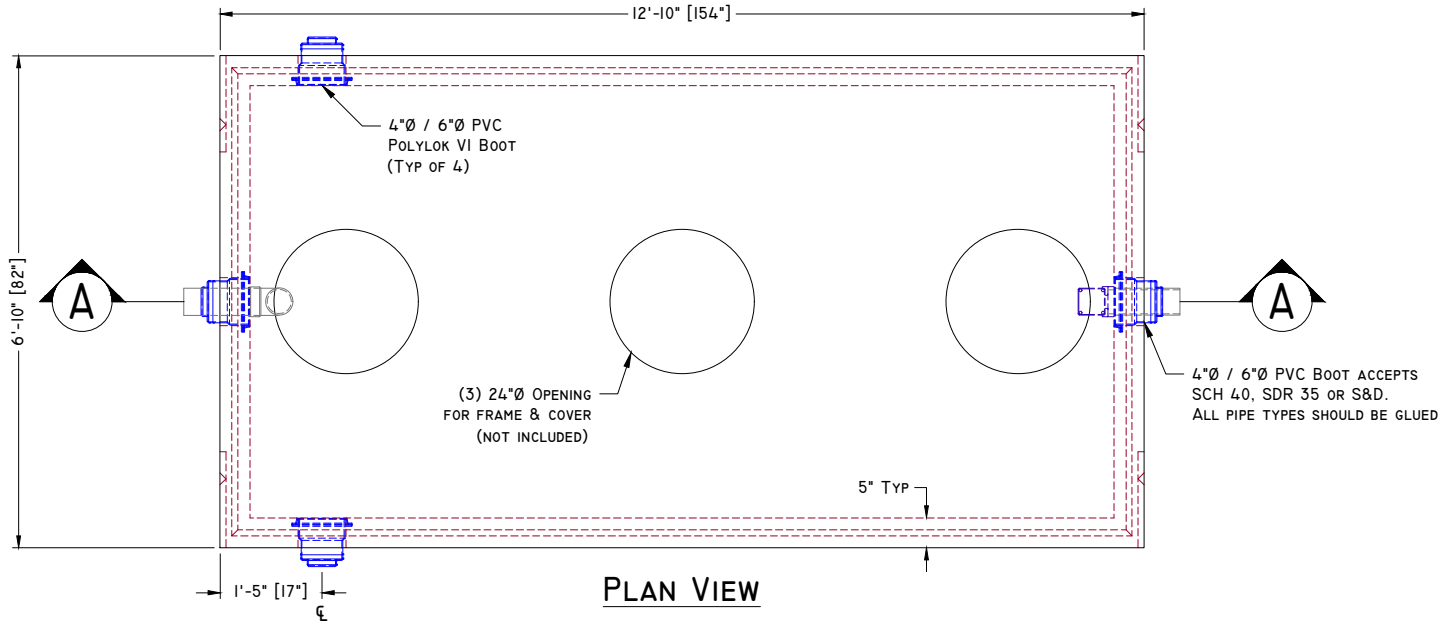

CONCEPTUAL VIEW - NTS

*Dimension is taken from bottom of tank
Manufacturing Notes

- 1.1. CONCRETE COMPRESSIVE STRENGTH: 5000psi @ 28 Days
- 1.2. AIR ENTRAINMENT: 4-6%
- 1.3. GRADE 60 REINFORCEMENT
- 1.4. TANKS SHOULD BE PUMPED EVERY 3-5 YEARS, DEPENDING ON USE
- 1.5. NEVER USE SEPTIC CLEANING AGENTS
- 1.6. DESIGNED FOR H20 LOAD RATING
- 1.7. REQUIRES GRADE RINGS TO GRADE & H20 FRAMES & COVERS
- 1.8. ALL TANK PENETRATIONS ARE INTEGRALLY CAST
- 1.9. ALL JOINTS SEALED W/ BUTYL RUBBER JOINT SEALANT

Physical Specifications:

Cover Weight: 6,995 lbs
 Tank Weight: 18,030 lbs
 Total Weight: 25,025 lbs
 Available Capacity: 2,359 gal (max)
 Working Capacity: 1,909 gal (4"Ø PVC) 1,865 gal (6"Ø PVC)