

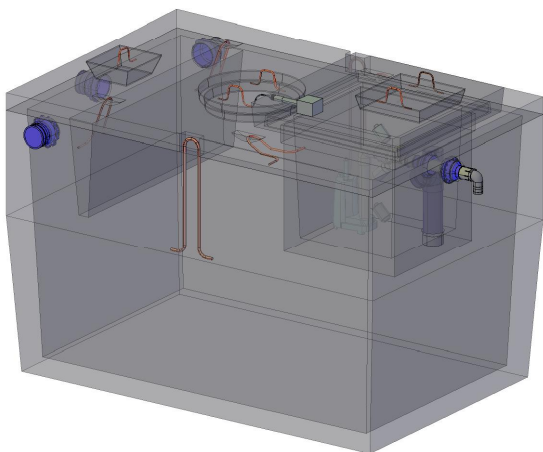


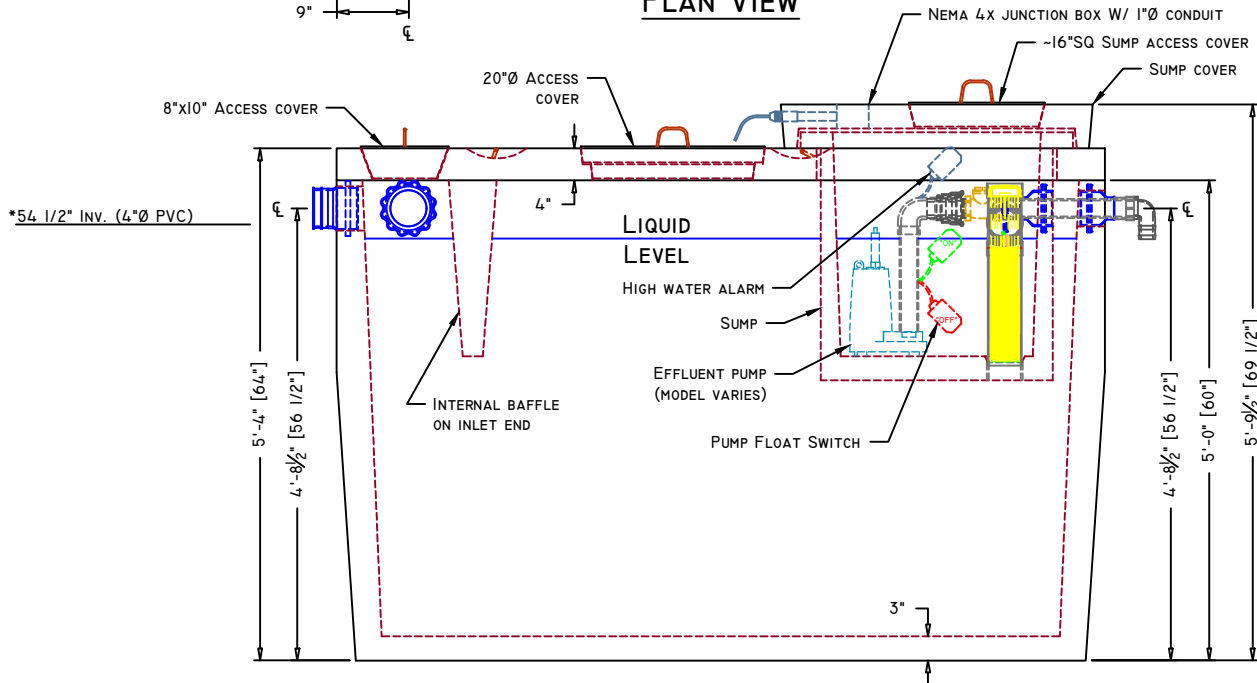

1000 GALLON REGULAR LIFT STATION

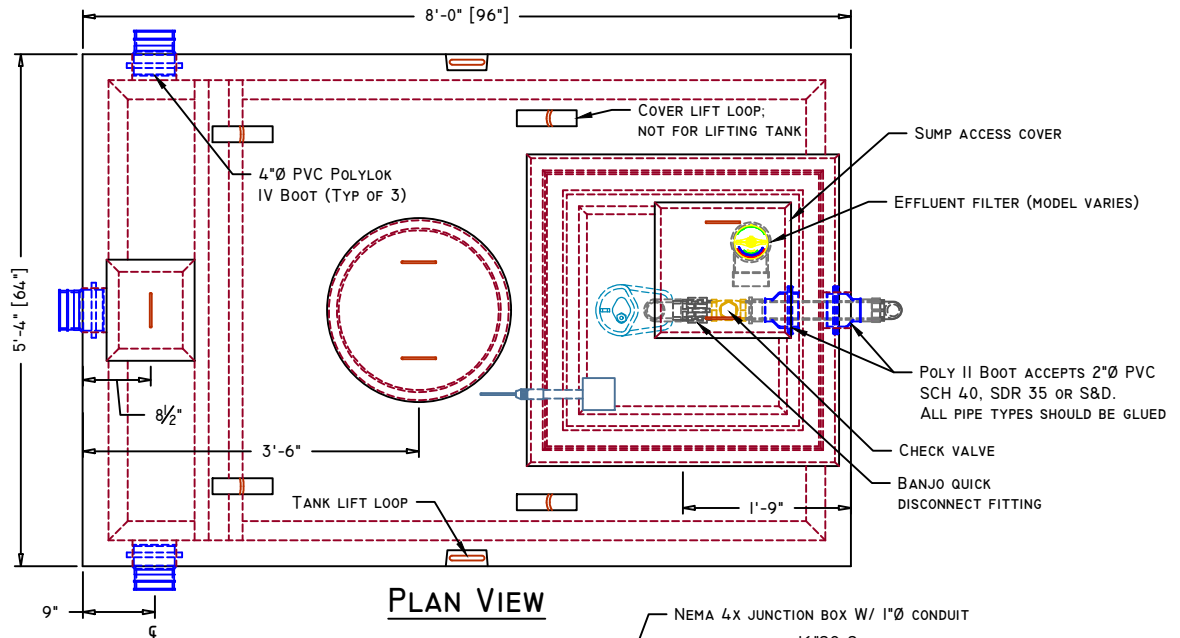

*Dimension is taken from bottom of tank

Manufacturing Notes

- 1.1. CONCRETE COMPRESSIVE STRENGTH: 4000PSI @ 28 DAYS
- 1.2. AIR ENTRAINMENT: 4-6%
- 1.3. GRADE 60 REINFORCEMENT
- 1.4. WWR & STRUCTURAL FIBER REINFORCED BASE
- 1.5. TANKS SHOULD BE PUMPED EVERY 3-5 YEARS, DEPENDING ON USE
- 1.6. NEVER USE SEPTIC CLEANING AGENTS
- 1.7. DESIGNED FOR PEDESTRIAN LOAD RATING ONLY
- 1.8. ALL TANK PENETRATIONS ARE INTEGRALLY CAST
- 1.9. ALL JOINTS SEALED W/ BUTYL RUBBER JOINT SEALANT
- 1.10. LIFT / PUSH / CORD LENGTH INFORMATION REQUIRED AT TIME OF ORDERING

Physical Specifications:

Cover Weight:	2,260 lbs
Tank Weight:	7,015 lbs
Sump Weight:	795 lbs
Sump Cover Weight:	440 lbs
Total Weight:	10,510 lbs
Available Capacity:	1,162 gal (max) W/O Baffle
Working Capacity:	993 gal (4"Ø PVC) W/ Baffle