

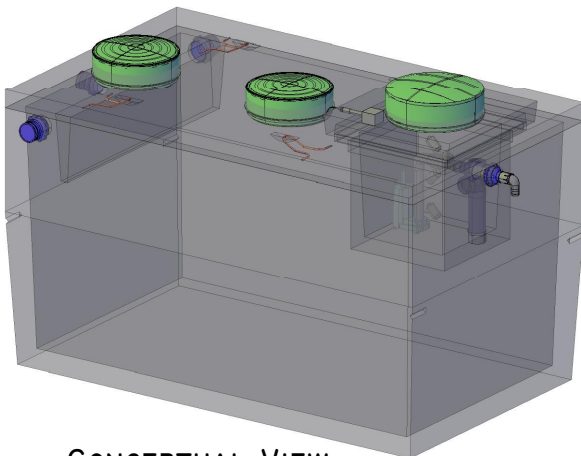


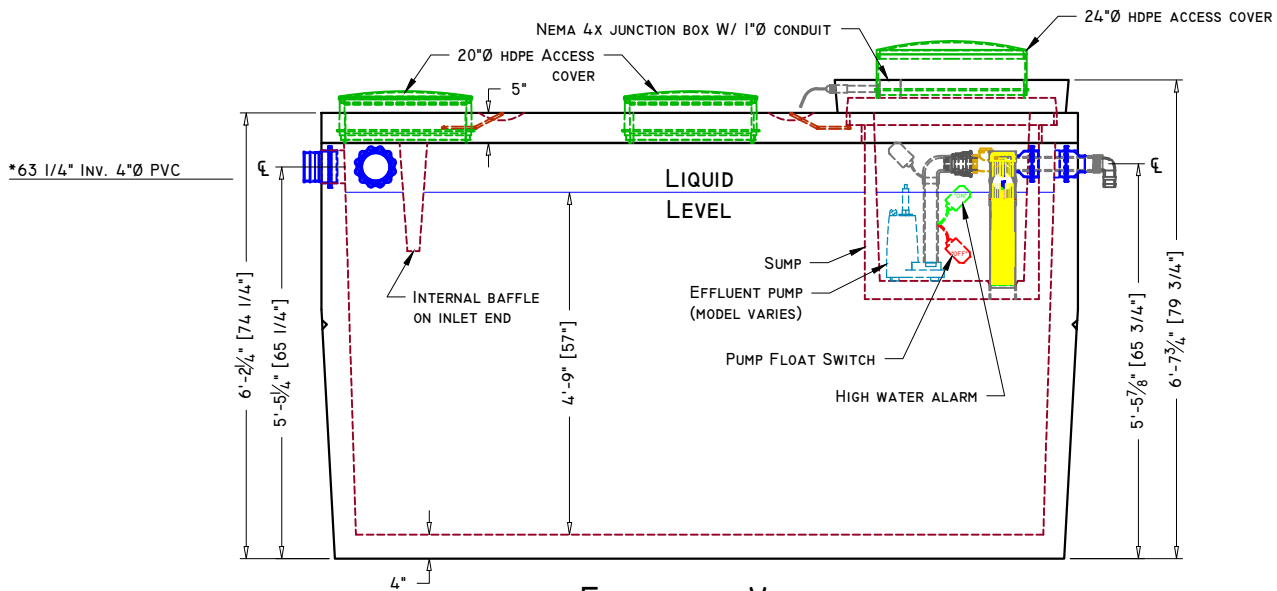

# American Concrete Industries

## 2000 GALLON REGULAR LIFT STATION (NEW STYLE)

WWW.AMERICANCONCRETE.COM  
 1717 STILLWATER AVE.  
 VEAZIE, ME. 04401  
 TEL: (207) 947-8334  
 FAX: (207) 947-3580

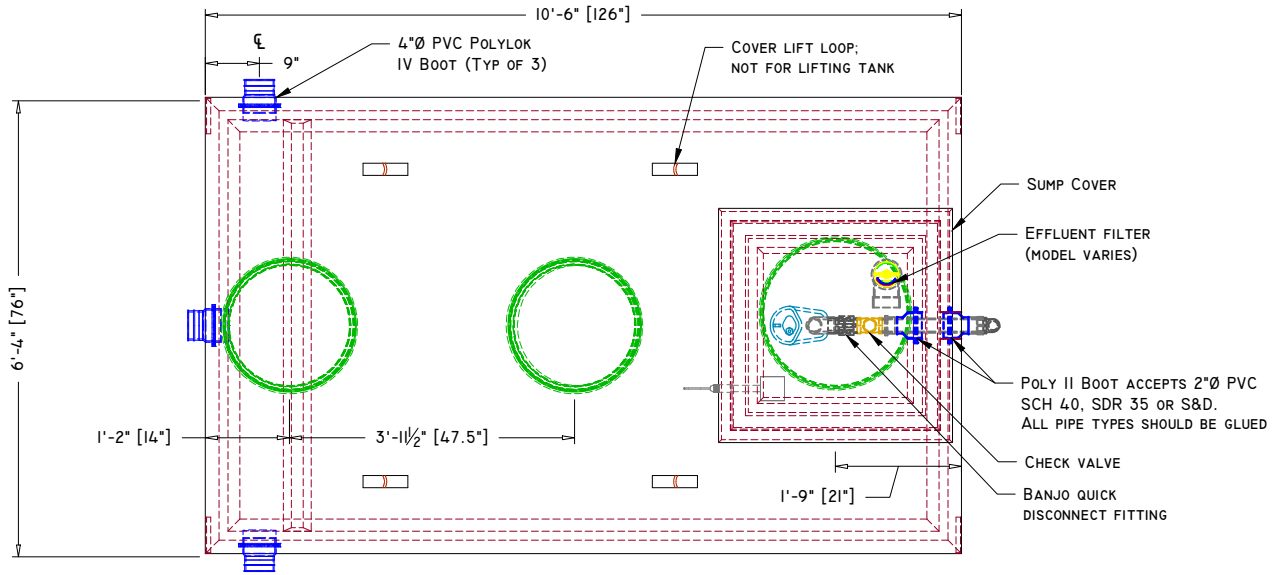

**CONCEPTUAL VIEW**

SCALE: NTS

\*Dimension is taken from bottom of tank

**Manufacturing Notes**

- I.1. CONCRETE COMPRESSIVE STRENGTH: 5000PSI @ 28 DAYS
- I.2. AIR ENTRAINMENT: 4-6%
- I.3. GRADE 60 REINFORCEMENT
- I.4. WWR & STRUCTURAL FIBER REINFORCED BASE
- I.5. TANKS SHOULD BE PUMPED EVERY 3-5 YEARS, DEPENDING ON USE
- I.6. NEVER USE SEPTIC CLEANING AGENTS
- I.7. DESIGNED FOR PEDESTRIAN LOAD RATING ONLY
- I.8. MAX BURY DEPTH: 24"
- I.9. ALL TANK PENETRATIONS ARE INTEGRALLY CAST
- I.10. ALL JOINTS SEALED W/ BUTYL RUBBER JOINT SEALANT
- I.11. LIFT / PUSH / CORD INFORMATION REQUIRED AT TIME OF ORDERING

**Physical Specifications:**

<b>Cover Weight:</b>	<b>3,784 lbs</b>
<b>Tank Weight:</b>	<b>12,035 lbs</b>
<b>Sump Weight:</b>	<b>795 lbs</b>
<b>Sump Cover Weight:</b>	<b>440 lbs</b>
<b>Total Weight:</b>	<b>17,054 lbs</b>
<b>Available Capacity:</b>	<b>2,138 gal (max) W/ Baffle</b>
<b>Working Capacity:</b>	<b>1,865 gal (4"Ø PVC) W/ Baffle</b>