




American Concrete Industries

WWW.AMERICANCONCRETE.COM
 1717 STILLWATER AVE.
 VEAZIE, ME. 04401
 TEL: (207) 947-8334
 FAX: (207) 947-3580

3'x3' PUMP TANK

	MODEL	ITEM #	HP	(V)	TDH RANGE	SHUTOFF	
EFFLUENT	253	351010	0.3	115	<13'	23'	
	283	351060	0.5	115	14'-27'	37'	
	280HV	351022	0.5	230	14'-27'	37'	
	293	351105	0.75	115	28'-38'	47'	
	293HV	351110	0.75	230	28'-38'	47'	
	FL51M	351120	0.5	115	39'-45'	55'	
	FL52M	351140	0.5	230	39'-45'	55'	
	FL62M	351180	0.6	230	45'-55'	65'	
	FL72M	351200	0.75	230	55'-63'	77'	
	FL102M-2	351220	1	230	63'-75'	90'	
SOLID PUMPING	LE51A	351275	0.5	115	<18'	24'	
	LE52M	351300	0.5	230	<18'	24'	
	LE71M2	351320	0.75	115	18'-23'	29'	
	LE72M2	351340	0.75	230	18'-23'	29'	
	LE102M2	351344	1	230	23'-31'	38'	
	LEH102M2	351350	1	230	31'-43'	53'	
	LEH152M2-2	351352	1.5	230	43'-63'	70'	
	LEH202M2-2	351360	2	230	63'-75'	82'	
	GRINDER	PRG101M	351380	1	115	<36'	51'
		PRG102M	351400	1	230	<36'	51'
LSGX202M*		351420	2	230	37'-90'	110'	
LSGX202M*		351480	2	230	91'-151'	184'	

*LSG REQUIRE - G90 ELBOW (342640)

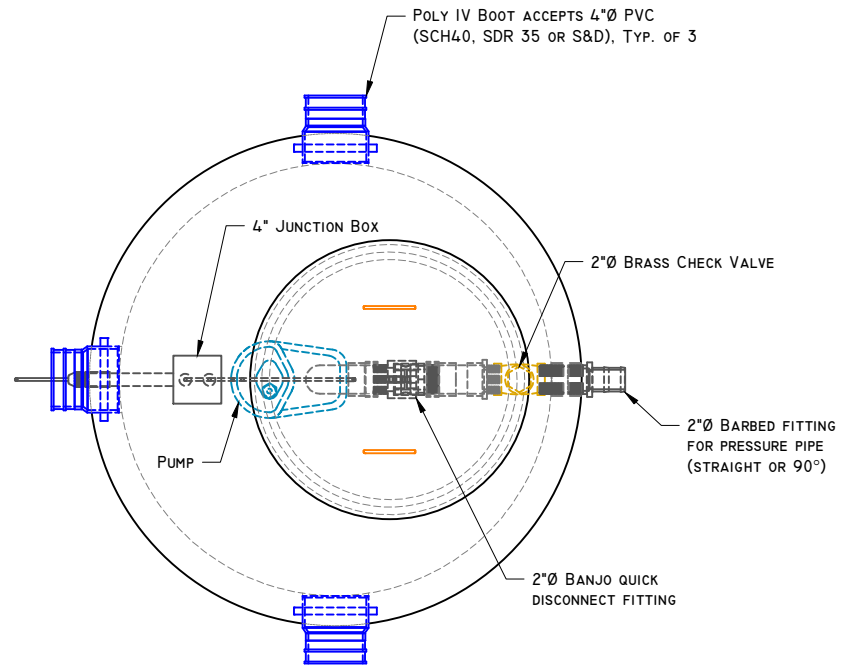


PLAN VIEW

Manufacturing Notes

- 1.1. CONCRETE COMPRESSIVE STRENGTH: 4000PSI @ 28 DAYS
- 1.2. AIR ENTRAINMENT: 4-6%
- 1.3. WWR & STRUCTURAL FIBER REINFORCED
- 1.4. NEVER USE SEPTIC CLEANING AGENTS
- 1.5. DESIGNED FOR PEDESTRIAN LOAD RATING ONLY
- 1.6. MAX BURY DEPTH: 24"
- 1.7. ALL TANK PENETRATIONS ARE INTEGRALLY CAST
- 1.8. ALL JOINTS SEALED W/ BUTYL RUBBER JOINT SEALANT
- 1.9. LIFT/PUSH/PUMP STYLE INFORMATION REQUIRED AT TIME OF ORDERING

Physical Specifications:

Cover Weight: 456 lbs
 Base Weight: 1,814 lbs
Total Weight: 2,270 lbs
 HWA Capacity: 98 gal
Dosing Capacity: 40 gal (average)
 Tank 'Full' Capacity: 155 gal

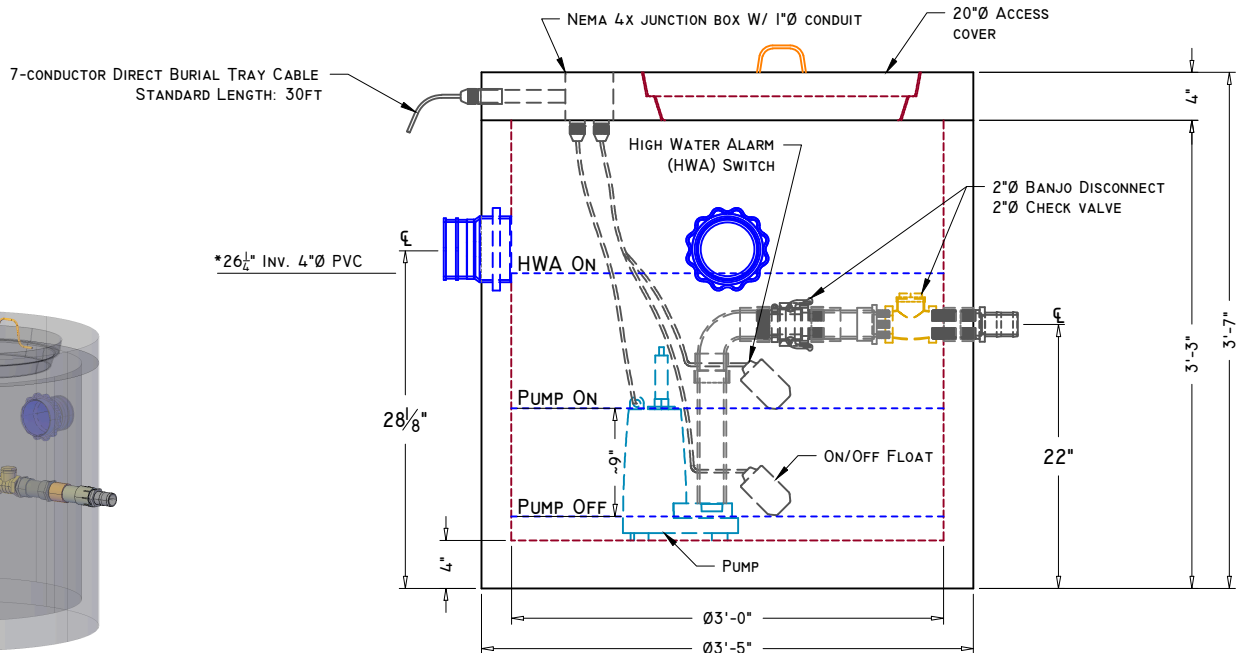

ELEVATION VIEW

CONCEPTUAL VIEW

SCALE: NTS

